
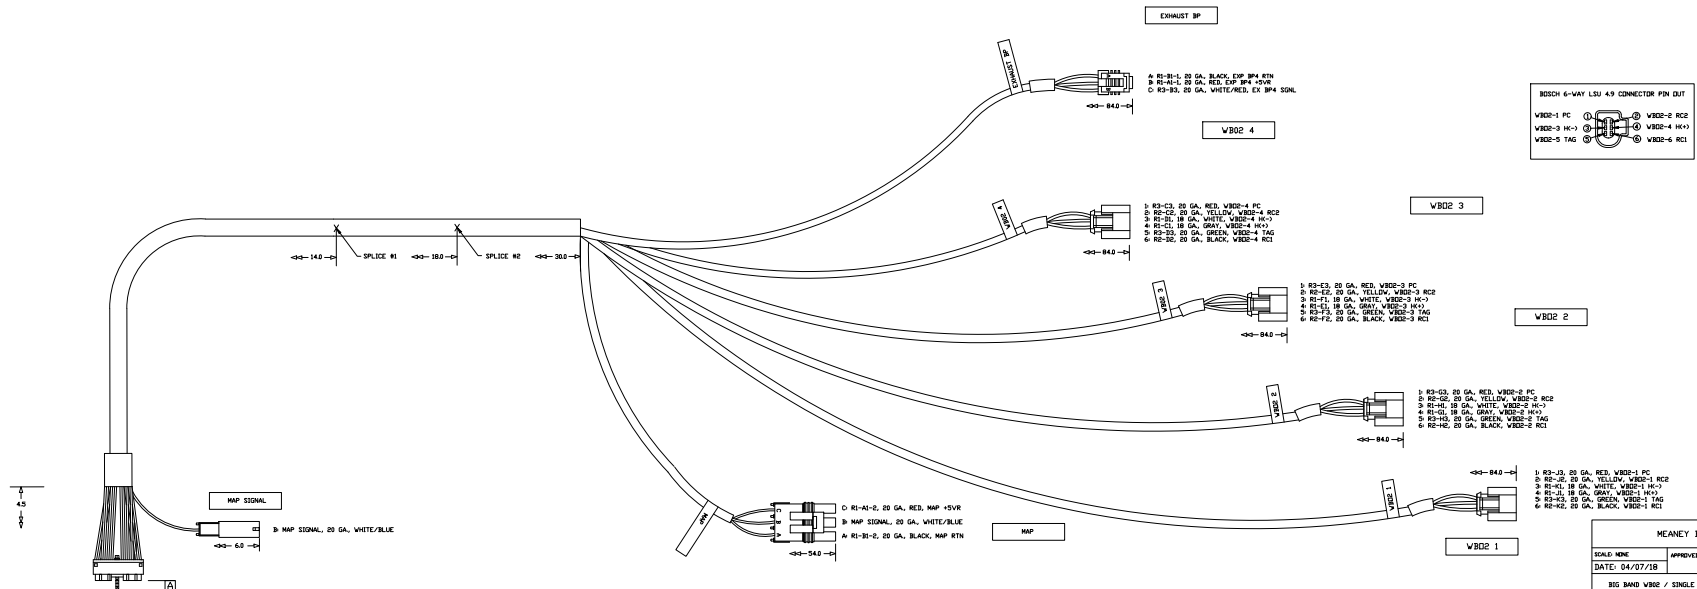



ECM CIRCUIT	WIRE GAUGE	GOES TO	WIRE COLOR	NOTES
R1-B1-1	20	A: EX BP RTN	BLACK	EX BP RTN
R1-A1-1	20	B: EX BP +5VR	RED	EX BP +5VR
R3-B3	20	C: EX BP SGNL	WHITE/RED	EX BP SGNL
R1-B1-2	20	A: MAP RTN	BLACK	MAP RTN
	20	B: MAP SGNL	WHITE/BLUE	MAP SGNL
R1-A1-2	20	C: MAP +5VR	RED	MAP +5VR
R3-C3	20	1: WBD2-4 FC	RED	WBD2-4 FC
R2-C2	20	2: WBD2-4 RC2	YELLOW	WBD2-4 RC2
R1-D1	18	3: WBD2-4 HC->	WHITE	WBD2-4 HC->
R1-C1	18	4: WBD2-4 HC+>	GRAY	WBD2-4 HC+>
R3-D3	20	5: WBD2-4 TAG	GREEN	WBD2-4 TAG
R2-D2	20	6: WBD2-4 RC1	BLACK	WBD2-4 RC1
R3-E3	20	1: WBD2-3 FC	RED	WBD2-3 FC
R2-E2	20	2: WBD2-3 RC2	YELLOW	WBD2-3 RC2
R1-F1	18	3: WBD2-3 HC->	WHITE	WBD2-3 HC->
R1-E1	18	4: WBD2-3 HC+>	GRAY	WBD2-3 HC+>
R3-F3	20	5: WBD2-3 TAG	GREEN	WBD2-3 TAG
R2-F2	20	6: WBD2-3 RC1	BLACK	WBD2-3 RC1
R3-G3	20	1: WBD2-2 FC	RED	WBD2-2 FC
R2-G2	20	2: WBD2-2 RC2	YELLOW	WBD2-2 RC2
R1-H1	18	3: WBD2-2 HC->	WHITE	WBD2-2 HC->
R1-G1	18	4: WBD2-2 HC+>	GRAY	WBD2-2 HC+>
R3-H3	20	5: WBD2-2 TAG	GREEN	WBD2-2 TAG
R2-H2	20	6: WBD2-2 RC1	BLACK	WBD2-2 RC1
R3-J3	20	1: WBD2-1 FC	RED	WBD2-1 FC
R2-J2	20	2: WBD2-1 RC2	YELLOW	WBD2-1 RC2
R1-K1	18	3: WBD2-1 HC->	WHITE	WBD2-1 HC->
R1-J1	18	4: WBD2-1 HC+>	GRAY	WBD2-1 HC+>
R3-K3	20	5: WBD2-1 TAG	GREEN	WBD2-1 TAG
R2-K2	20	6: WBD2-1 RC1	BLACK	WBD2-1 RC1




EXHAUST BP

WBD 4

WBD 3

WBD 2

WBD 1



- A: R1-B1-1, 20 GA, BLACK, EX BP RTN
- B: R1-A1-1, 20 GA, RED, EX BP +5VR
- C: R3-B3, 20 GA, WHITE/RED, EX BP SGNL

- 1: R3-C3, 20 GA, RED, WBD2-4 FC
- 2: R2-C2, 20 GA, YELLOW, WBD2-4 RC2
- 3: R1-D1, 18 GA, WHITE, WBD2-4 HC->
- 4: R1-C1, 18 GA, GRAY, WBD2-4 HC+>
- 5: R3-D3, 20 GA, GREEN, WBD2-4 TAG
- 6: R2-D2, 20 GA, BLACK, WBD2-4 RC1

- 1: R3-E3, 20 GA, RED, WBD2-3 FC
- 2: R2-E2, 20 GA, YELLOW, WBD2-3 RC2
- 3: R1-F1, 18 GA, WHITE, WBD2-3 HC->
- 4: R1-E1, 18 GA, GRAY, WBD2-3 HC+>
- 5: R3-F3, 20 GA, GREEN, WBD2-3 TAG
- 6: R2-F2, 20 GA, BLACK, WBD2-3 RC1

- 1: R3-G3, 20 GA, RED, WBD2-2 FC
- 2: R2-G2, 20 GA, YELLOW, WBD2-2 RC2
- 3: R1-H1, 18 GA, WHITE, WBD2-2 HC->
- 4: R1-G1, 18 GA, GRAY, WBD2-2 HC+>
- 5: R3-H3, 20 GA, GREEN, WBD2-2 TAG
- 6: R2-H2, 20 GA, BLACK, WBD2-2 RC1

- 1: R3-J3, 20 GA, RED, WBD2-1 FC
- 2: R2-J2, 20 GA, YELLOW, WBD2-1 RC2
- 3: R1-K1, 18 GA, WHITE, WBD2-1 HC->
- 4: R1-J1, 18 GA, GRAY, WBD2-1 HC+>
- 5: R3-K3, 20 GA, GREEN, WBD2-1 TAG
- 6: R2-K2, 20 GA, BLACK, WBD2-1 RC1

MEANEY BROTHERS, INC.			
SEALD NAME	APPROVED BY:	DRAWN BY:	JMI
DATE: 04/07/18		REV. E	
BIG BAND WBD / SINGLE EX BACK PRESSURE / MAP M/M			DRAWING NUMBER
			JMI-006-069