


NOTES:

- 10. ALL DIMENSIONS SHOWN WITH SYMBOL  $\leftrightarrow$  END AT 30-WAY CONNECTOR AT DATUM A
- 11. ALL DIMENSIONS ARE INCHES WITH A TOLERANCE OF +/- 0.50".

ECM CIRCUIT	WIRE GAUGE	GOES TO	WIRE COLOR	NOTES
R2-A2	16	1: GPI0	BLUE/GREEN	SPARE INJ DRVR
R2-M2	18	2: GPI0	BLUE/RED	GPI0_1
R3-M3	18	3: GPI0	BLUE/YELLOW	GPI0_2
R2-N2	18	4: GPI0	BLUE/WHITE	GPI0_3
R3-N3	18	5: GPI0	BLUE/GRAY	GPI0_4
R2-P2	18	6: GPI0	BLUE/PINK	GPI0_5
R3-P3	18	7: GPI0	BLUE/PURPLE	GPI0_6
R2-S2	18	8: GPI0	BLUE/BLACK	GPI0_7
R1-J1-1	18	1: SPARE A/D +5VR	RED	WHEELIE CONTROL +5VR
R1-J1-2	18	2: SPARE A/D +5VR	RED	A/D_1 +5VR
R1-J1-3	18	3: SPARE A/D +5VR	RED	A/D_2 +5VR
R1-J1-4	18	4: SPARE A/D +5VR	RED	A/D_3 +5VR
R1-J1-5	18	5: SPARE A/D +5VR	RED	A/D_4 +5VR
R2-K2-1	18	1: SPARE A/D RTN	BLACK	WHEELIE CONTROL RTN
R2-K2-2	18	2: SPARE A/D RTN	BLACK	A/D_1 RTN
R2-K2-3	18	3: SPARE A/D RTN	BLACK	A/D_2 RTN
R2-K2-4	18	4: SPARE A/D RTN	BLACK	A/D_3 RTN
R2-K2-5	18	5: SPARE A/D RTN	BLACK	A/D_4 RTN
R2-C2	18	1: SPARE A/D SIGNAL	WHITE/BLUE	WHEELIE CONTROL SIGNAL
R1-A1	18	2: SPARE A/D SIGNAL	WHITE/GREEN	A/D_1 SIGNAL
R2-E2	18	3: SPARE A/D SIGNAL	WHITE/RED	A/D_2 SIGNAL
R1-F1	18	4: SPARE A/D SIGNAL	WHITE/YELLOW	A/D_3 SIGNAL
R2-H2	18	5: SPARE A/D SIGNAL	WHITE/PINK	A/D_4 SIGNAL
R1-J1-6	18	1: ACCESSORY +5VR	RED	ACCESSORY +5VR
R2-K2-6	18	2: ACCESSORY RTN	BLACK	ACCESSORY RTN

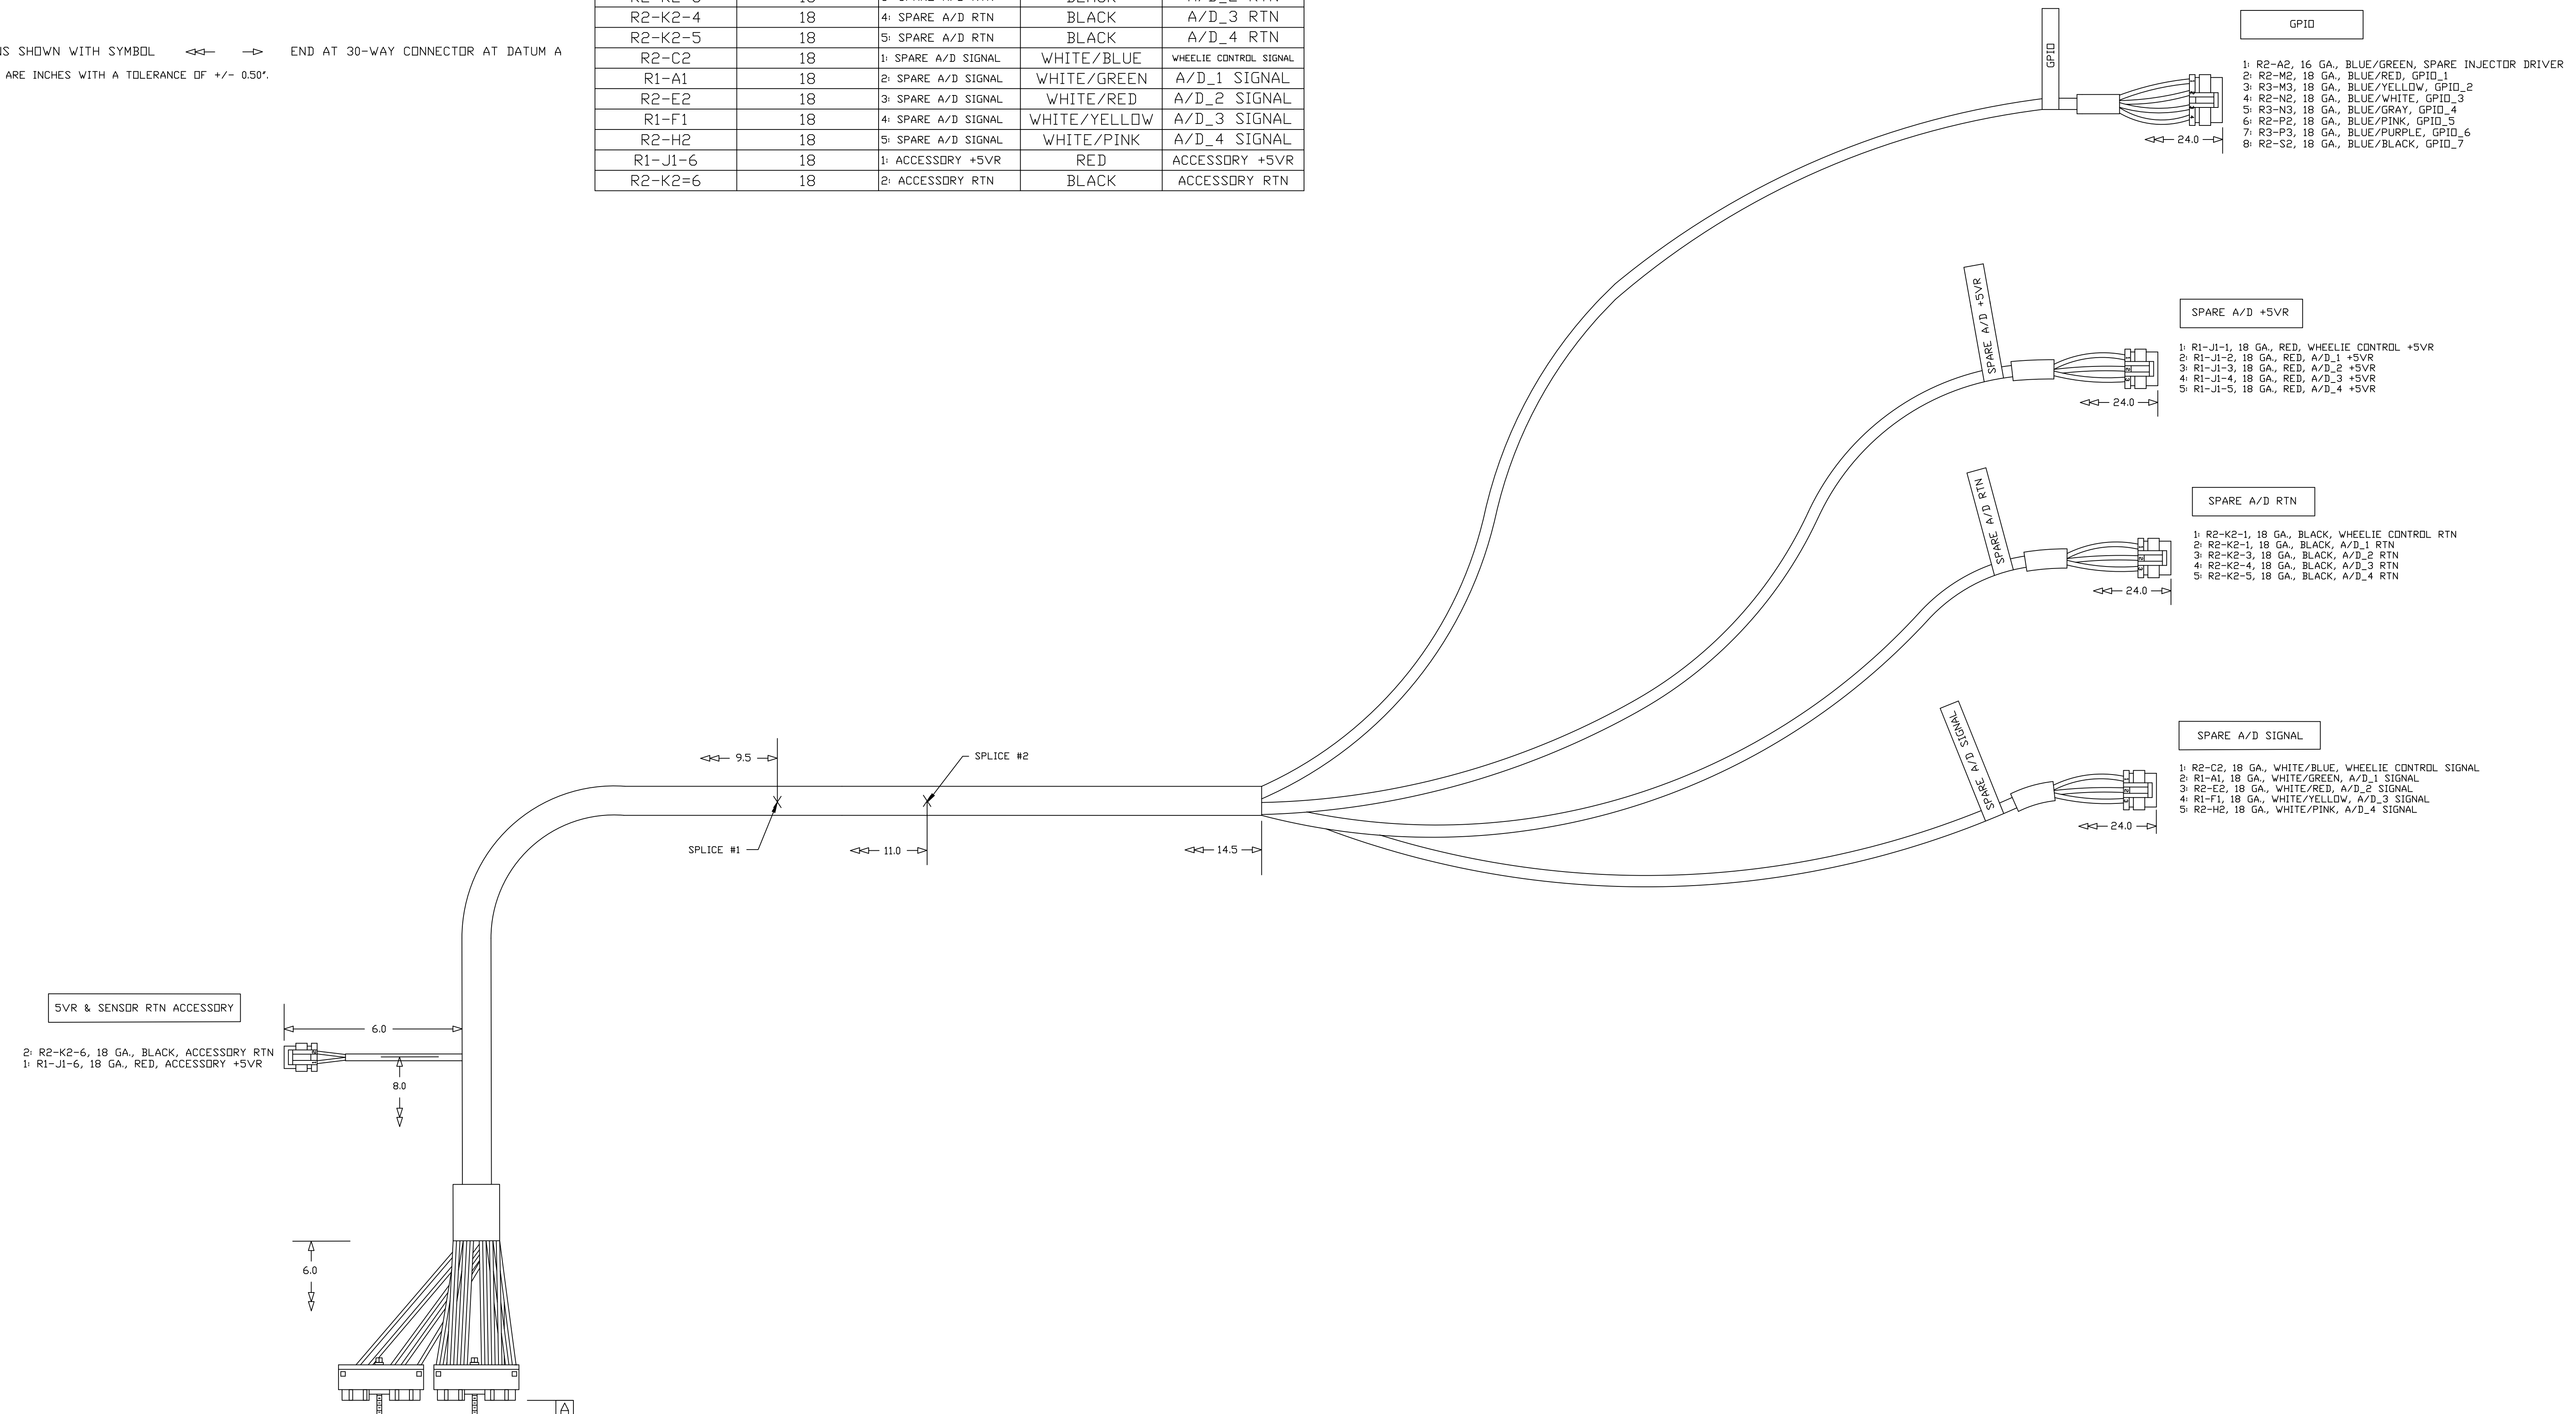

MEANEY BROTHERS, INC.		
SCALE: NONE	APPROVED BY:	DRAWN BY: JHM
DATE: 04/06/18		REV. A
GEN4 PRO XTREME DAE3 MWH		
Customer version	DRAWING NUMBER JMI-006-080	